



**CAN-AM DEFENDER
WIPER KIT p/n: 1CANDEFVWPR**

The contents of this envelope are the property of the owner.
Be sure to leave with the owner when installation is complete.



California Proposition 65
⚠ WARNING ⚠
Engine exhaust, some of its constituents, certain vehicle components and fluids, contain or emit chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

revised: 4-11-2017

1. WIPER INSTALLATION

1.1 Per fig. 1.1, mount the wiper motor and the flat cover plate to the inside surface of the windshield.

CAUTION: The inside surface of the windshield is coated with a plasticized safety film. Use care to avoid scratching the inside surface.

Sandwich the windshield where shown. Orient the bosses on the left-most plastic washers as shown (pointing towards the windshield location/placement). NOTE: if the bosses do not fit into the holes in the windshield, the installation can still be completed as is.

1.2 Carefully cut out the rectangle shown in the dashboard in fig. 1.2. Route the wiper harness through the dashboard.

1.3 Connect the wiper switch with the wiper harness and press the switch into the rectangular opening.

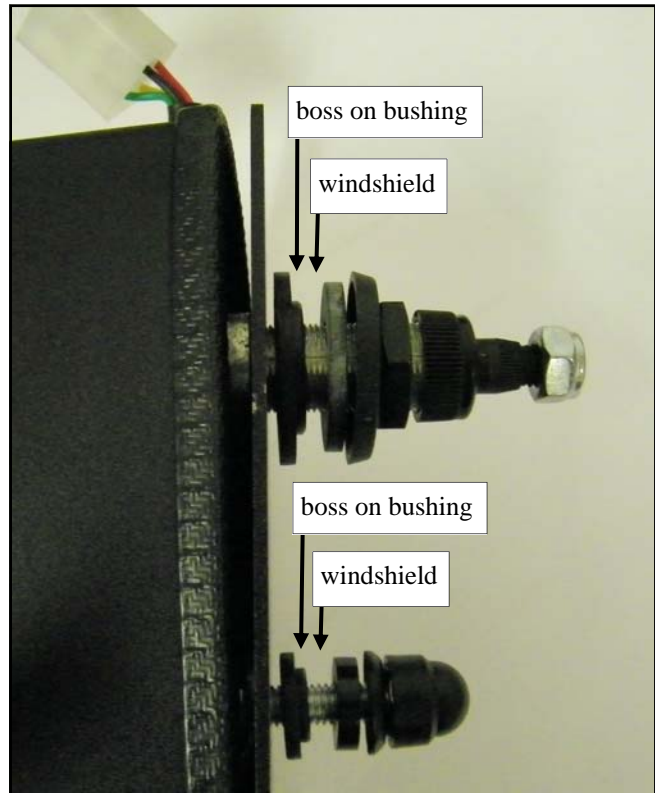


Fig. 1.1



Fig. 1.2

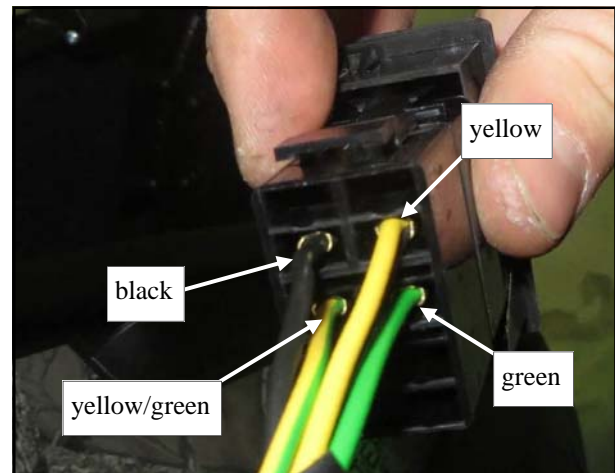


Fig. 1.3

1. WIPER INSTALLATION (cont'd.)

1.4 Drill a 5/8" diameter hole approximately where shown in fig. 1.4.

1.5 Install the supplied rubber grommet into the hole.

1.6 Install the harness cover ledge into position and assemble as required.



Fig. 1.4



Fig. 1.5

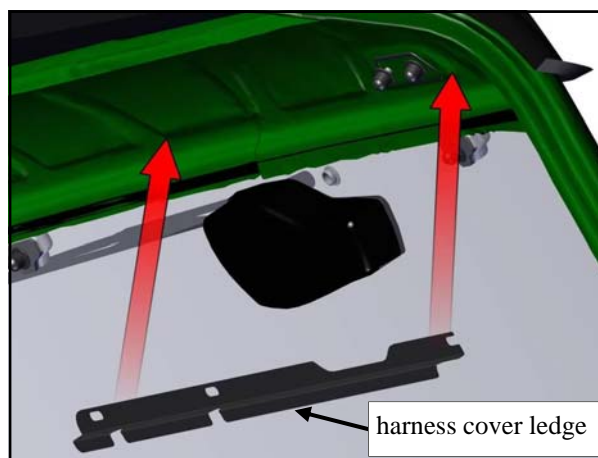


Fig. 1.6

1. WIPER INSTALLATION (cont'd.)

1.7 Connect the wiper harness to the wiper motor.

1.8 Connect the wiper harness to the UTV power source.

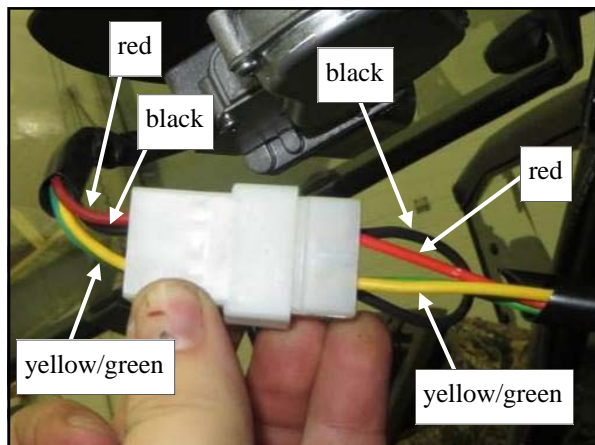


Fig. 1.7

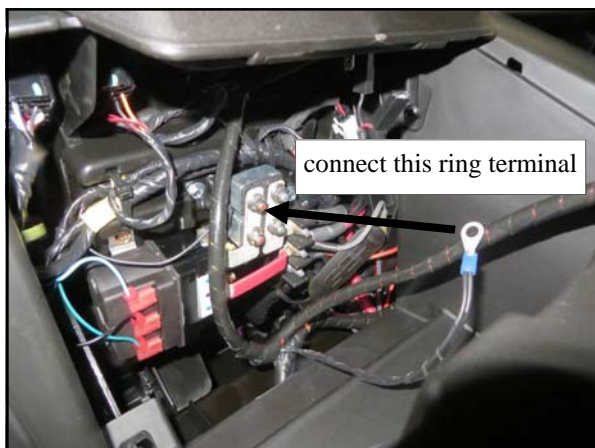


Fig. 1.8

SERVICE PARTS

PART NUMBER:	DESCRIPTION:
9SV-00078	WIPER ARM (QTY.: ONE)
9SV-00079	WIPER BLADE (QTY.: ONE)
9SV-00097	SWITCH FOR WIPER (QTY.: ONE)